




Model	Power		Outlet (inch)	m³/h l/min	0	0.9	1.2	1.5	1.8	2.4
	kW	HP			0	15	20	25	30	40
4SP2-9	0.37	0.5	1.25"	H(m)	54	48	44	41	37	23
4SP2-13	0.55	0.75			79	69	64	60	54	39
4SP2-18	0.75	1			107	93	87	80	73	55
4SP2-23	1.1	1.5			135	120	111	103	97	73
4SP2-28	1.5	2			160	150	139	129	114	81
4SP2-33	1.5	2			188	169	161	149	133	97
4SP2-40	2.2	3			227	202	187	172	156	122
4SP2-48	2.2	3			282	254	235	215	192	142

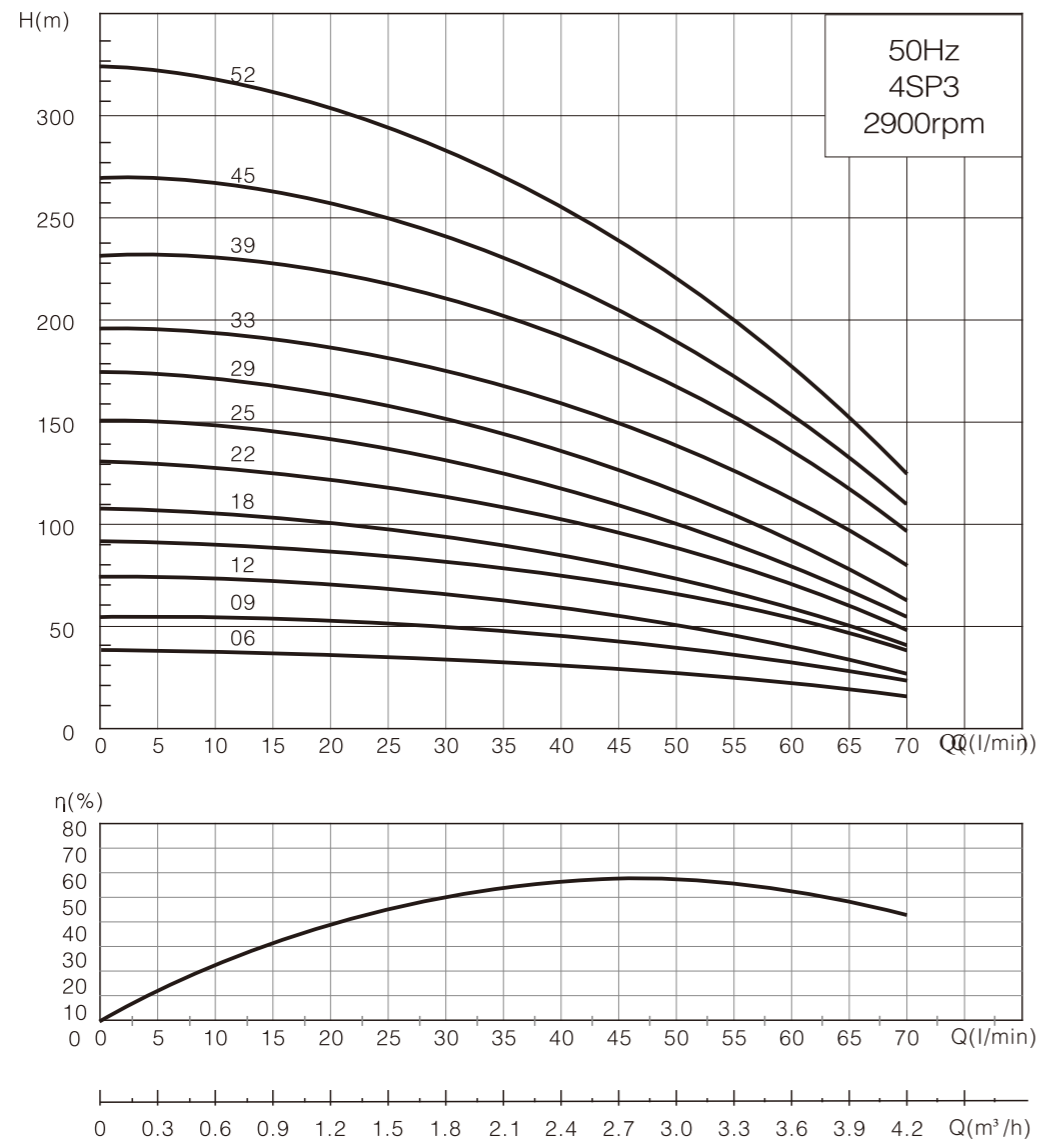


Model	Power		Outlet (inch)	m³/h l/min	0	2.1	2.4	3.0	3.6	4.2
	kW	HP			0	35	40	50	60	70
4SP3-6	0.37	0.5	1.25"	H(m)	37	31	29	26	21	16
4SP3-9	0.55	0.75			55	48	44	38	31	23
4SP3-12	0.75	1			74	63	58	51	40	26
4SP3-15	1.1	1.5			92	80	77	69	57	40
4SP3-18	1.1	1.5			108	89	82	72	59	41
4SP3-22	1.5	2			131	111	101	88	72	49
4SP3-25	1.5	2			151	126	115	98	78	53
4SP3-29	2.2	3			177	148	138	118	92	62
4SP3-33	2.2	3			198	172	164	145	118	80
4SP3-39	3	4			232	204	195	172	138	94
4SP3-45	3	4	272	233	224	199	162	110		
4SP3-52	4	5.5	328	272	261	230	184	123		

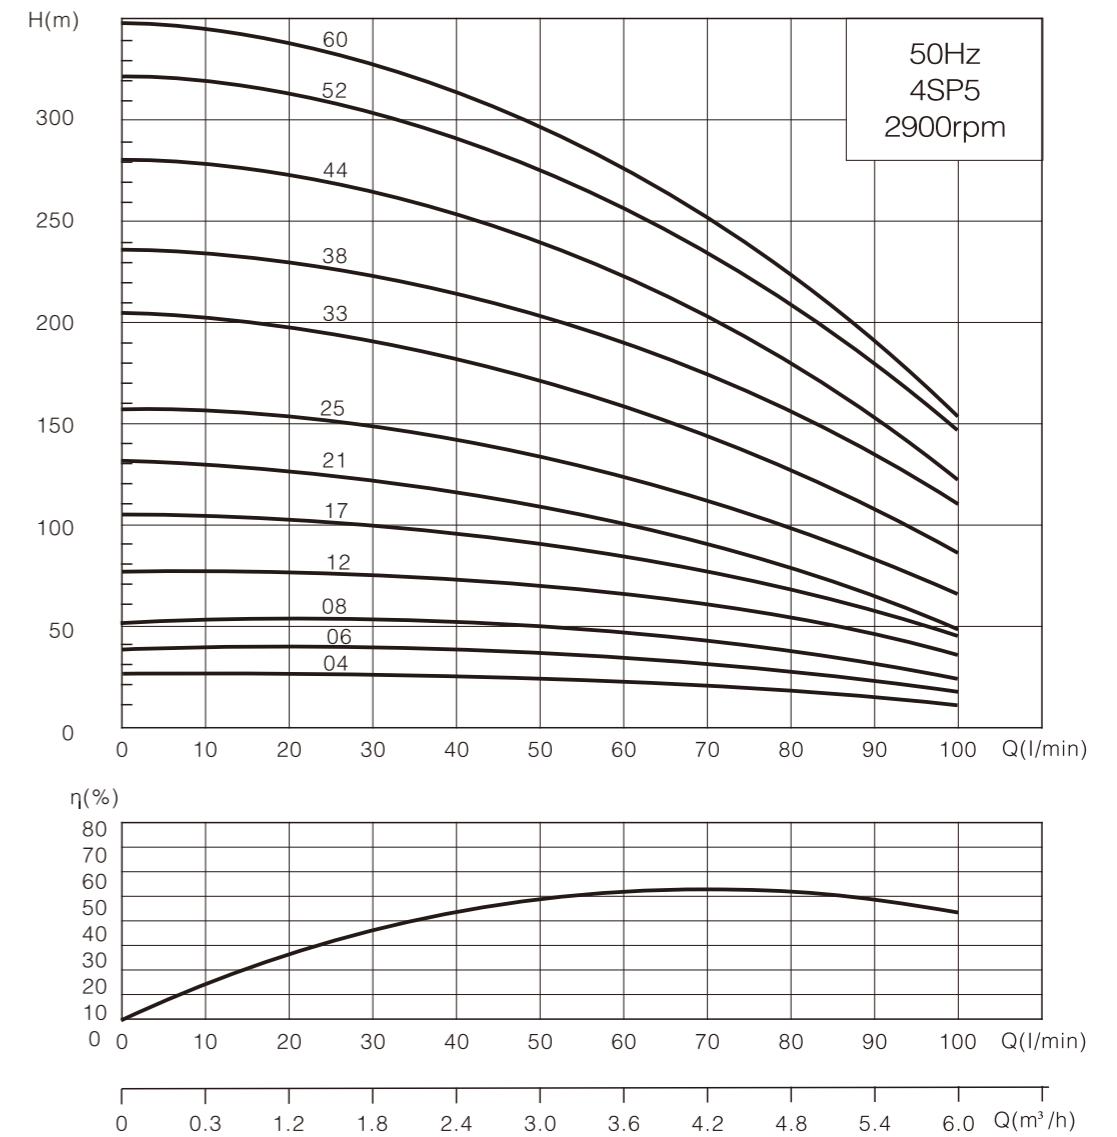

Model	Power		Outlet (inch)	m³/h l/min	0	3	3.6	4.2	4.8	6
	kW	HP			0	50	60	70	80	100
4SP5-4	0.37	0.5	1.5"	H(m)	25	20	19	17	16	10
4SP5-6	0.55	0.75			38	31	29	27	25	18
4SP5-8	0.75	1			51	42	39	37	33	24
4SP5-12	1.1	1.5			76	61	58	53	48	34
4SP5-17	1.5	2			105	82	79	74	66	46
4SP5-21	2.2	3			131	103	99	93	85	58
4SP5-25	2.2	3			156	125	118	110	88	66
4SP5-33	3	4			205	166	156	147	132	86
4SP5-38	4	5.5			237	195	184	173	156	110
4SP5-44	4	5.5			281	221	210	195	176	121
4SP5-52	5.5	7.5			321	261	247	233	209	147
4SP5-60	5.5	7.5			349	294	276	256	225	155

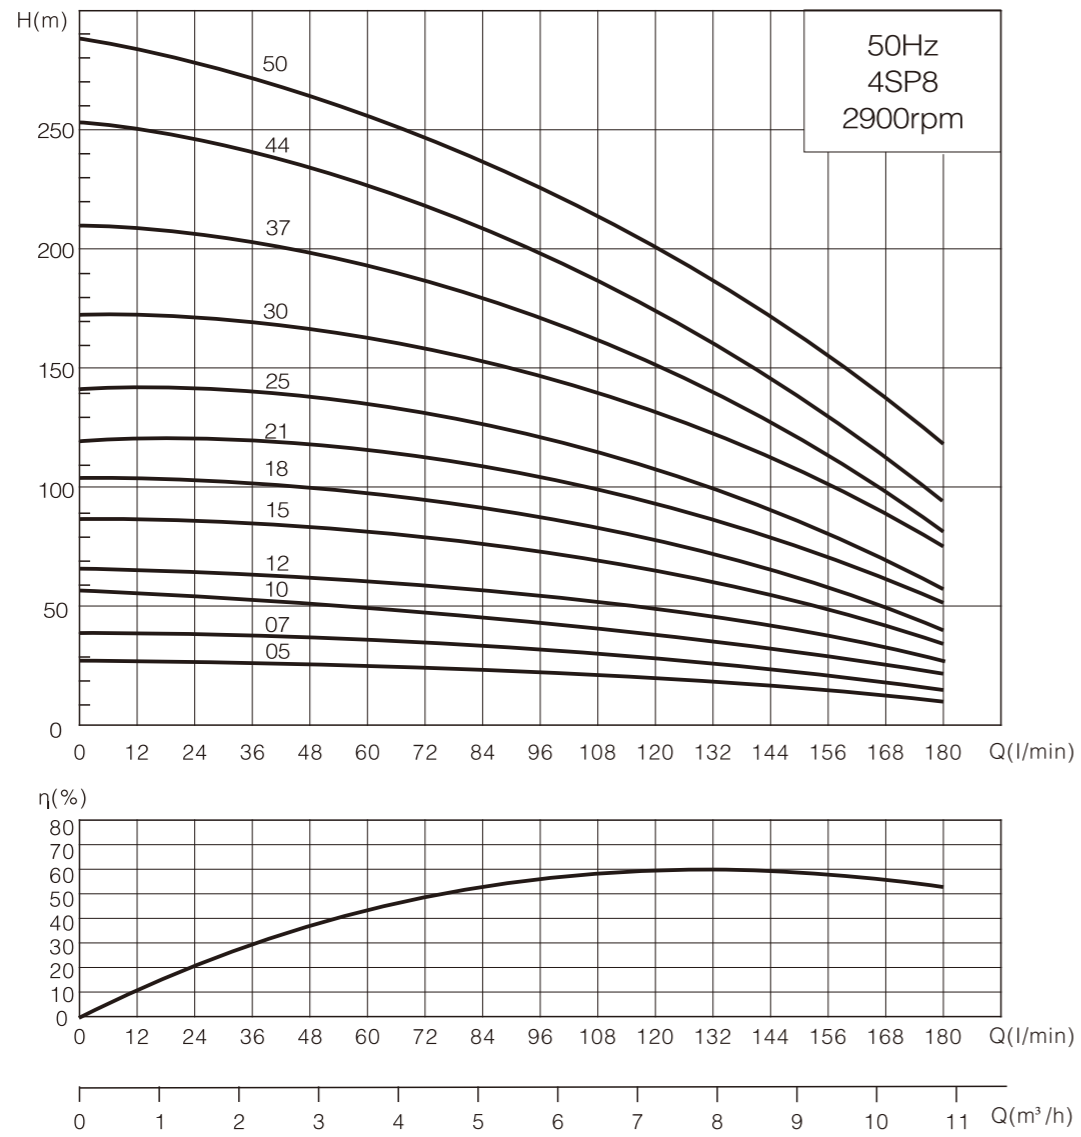

Model	Power		Outlet (inch)	m³/h	0	3.6	4.8	8.4	9.6	10.8
	kW	HP			l/min	0	60	80	140	160
4SP8-5	0.75	1	2"	H(m)	29	25	24	19	16	12
4SP8-7	1.1	1.5			40	35	33	26	21	16
4SP8-10	1.5	2			58	49	47	38	31	23
4SP8-12	2.2	3			67	58	55	45	38	29
4SP8-15	2.2	3			87	74	69	56	46	36
4SP8-18	3	4			103	88	83	63	54	41
4SP8-21	4	5.5			120	103	97	80	67	51
4SP8-25	4	5.5			142	125	118	93	77	57
4SP8-130	5.5	7.5			172	153	144	115	100	76
4SP8-37	5.5	7.5			210	175	165	130	105	82
4SP8-44	7.5	10	251	215	204	161	135	95		
4SP8-50	7.5	10	288	254	242	198	168	129		

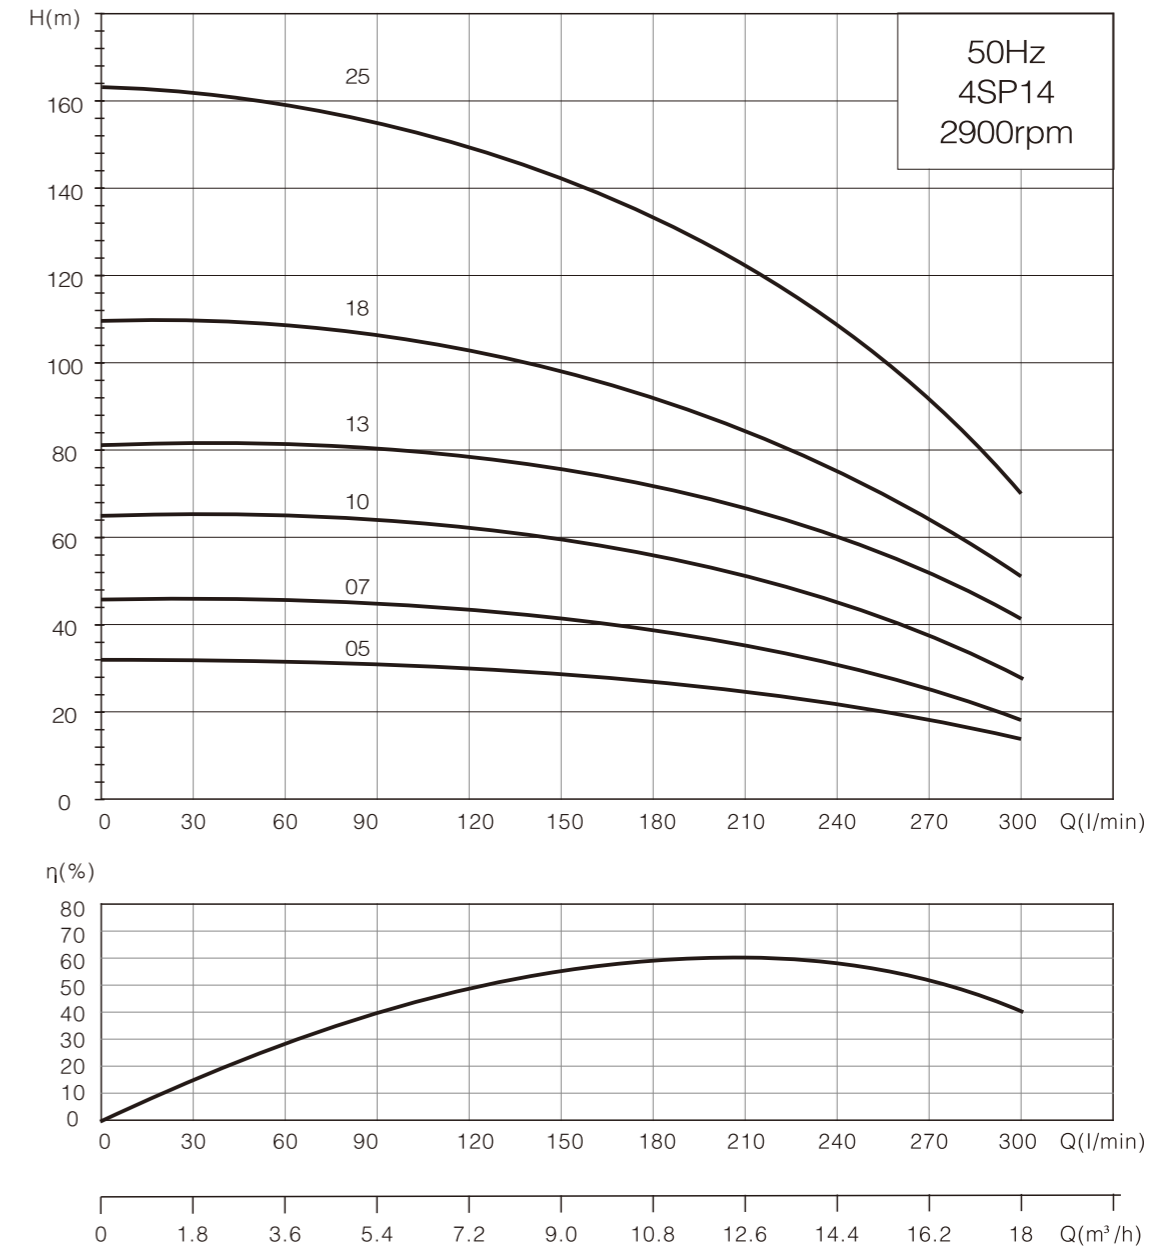

Model	Power		Outlet (inch)	m³/h	0	6	8.4	12	15	18
	kW	HP			l/min	0	100	140	200	250
4SP14-5	1.5	2	2"	H(m)	33	30	29	25	20	14
4SP14-7	2.2	3			45	43	41	36	28	19
4SP14-10	3	4			65	61	58	51	41	28
4SP14-13	4	5.5			81	73	69	63	53	41
4SP14-18	5.5	7.5			112	98	93	84	72	53
4SP14-25	7.5	10			164	150	140	120	93	70